

## StarBoard *Link EZ*

# Unit Type Interactive Whiteboard System




### StarBoard Link EZ turns any dry erase board or surface into a fully functioning Interactive Whiteboard!

Easy to set up, easy to use. Attach your StarBoard Link EZ system to any flat surface, connect it to a computer, connect the computer to a projector, a quick set-up routine and you are ready to start teaching with a fully functioning IWB.



#### Easy installation

StarBoard Link EZ secures to any flat surface in minutes to transform a static wall into an interactive environment.



#### Finger-driven technology

Use your finger, stylus or any object to easily navigate through activities, websites, and multi-media content.



#### Flexible active area


The size of active area is adjustable - from 45" if the surface is limited, to 90" for the rooms where a bigger size of projection and work space is required.



#### Multi-touch hand gestures

Use your finger to annotate, fist to scroll and two fingers to erase or zoom in and out.

# StarBoard Link EZ

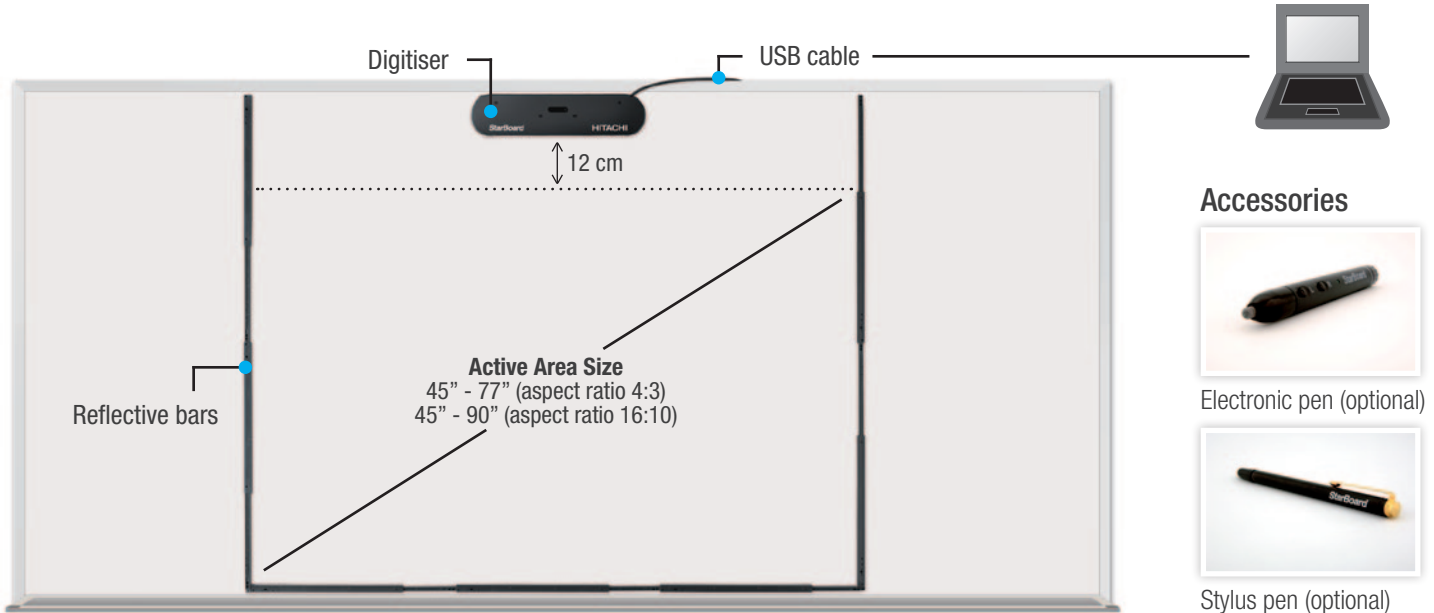

## Accessories



Electronic pen (optional)



Stylus pen (optional)



## StarBoard software is included with every purchase of StarBoard Link EZ

- Support of different OS
- Customisable floating toolbar
- Variety of digital inks
- Hand writing recognition
- Direct access to the Internet, Google image search
- Import Microsoft Office files (Word, PPT...)
- Remote conferencing

## Product Specifications

### Hardware Specification

**Model Name**  
StarBoard Link EZ

**Model No.**  
AH00292

**Digitising Technology**  
Infrared Image Sensor System

**Interface to Computer**  
USB 1.1, 2.0 (cable length: 7.0 m)

**Active Area Size**  
45" - 77" (aspect ratio 4:3)  
45" - 90" (aspect ratio 16:10)

**Coordinate Resolution**  
Approx. 0.05 mm

**Tracking Speed**  
Approx. 100 points/sec

### Digitiser Dimensions

1 220(W) × 845(H) × 66(D) mm  
48 (W) × 33.2 (H) × 2.6(D) inches

### Reflective Bars Dimensions

464 - 733(W) × 23(H) × 21(D) mm  
18.2 - 28.8(W) × 0.9 (H) × 0.83 (D) inches

### Weight

Approx. 1.5 kg (3.3 lbs)  
(Digitiser: 0.8kg (1.76 lbs), Reflective bars:  
0.7kg (1.54 lbs) )

### Packing Dimensions

260 x 540 x 150 mm  
10.3 x 21.3 x 6 inches

### Packing Weight

Approx. 3.5kg (7.8 lbs)

### Operating Specification

+5 - +35 °C (41 - 95 °F), 20-80% Humidity

### Storage Specification

-10 - +45 °C (14-113 °F), 20-80% Humidity

### Power Consumption

5V 500mA (USB Bus Power)

### Certificates

VCCI Class A, FCC Class B, CE

### Software Specification

#### PC Requirements

OS MS Windows XP(32 bit) / Vista /7(32/64bit), latest service pack must be applied (Tablet PC and Server Edition are currently not supported); CPU Intel Pentium 4 1.8GHz or higher; RAM 1 GB or more is recommended; HDD 600 MB of free space; Display Color Depth 16 bit or more.

#### Mac Requirements

Mac OS X 10.4 / 10.5 / 10.6, latest service pack must be applied; CPU IntelR processor; RAM 1 GB or more is recommended; HDD 600 MB of free space; Display Color Depth 16 bit or more.

info@hitachistarboard.be  
www.hitachistarboard.be

**HITACHI**  
Inspire the Next



Hitachi sets  
"Environmental Vision 2025"  
www.hitachi.com/environment/

**StarBoard**